


ROTOMATIC

All advantages at a glance

- ▶ Processing of large quantities in a short time
- ▶ Personnel-saving and economical operation
- ▶ Easy integration into existing production lines
- ▶ Different part sizes/weights can be processed
- ▶ High work piece cleanliness thanks to separation and cleaning station
- ▶ Adjustable processing time (from 5 to 20 minutes)

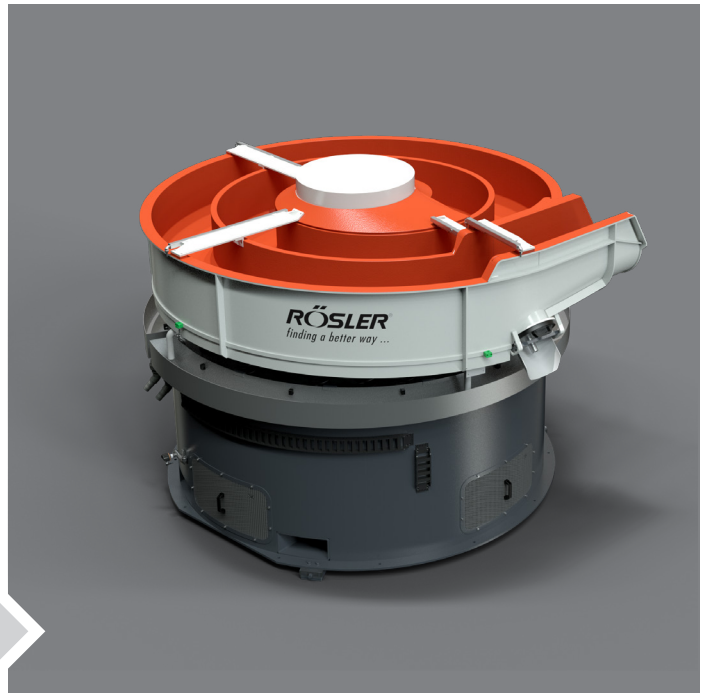

Type:	R 150/15 SE	R 200/18 SE	R210/27 SE	R280/24 SE	R 370/12 SE	R 200/18 SI
Lenght work bowl (m)	15	18	27	24	12	18
Machine Lenght (mm)	4.300	5.100	5.800	5.600	5.200	3.100
Machine Height (mm)	2.600	3.000	3.600	3.700	3.400	2.800
Total Height (mm)	2.000	2.250	2.250	2.300	2.250	1.700
Width work bowl (mm)	150	200	210	280	370	200
Height work bowl (mm)	230	280	240	320	420	280
Discharge height (mm)	860	860	860	840	860	1.360
Discharge width (mm)	500	500	500	500	500	500
Total installed power (kW)	12	17	17	17	17	12
Vibratory drive (kW)	7,5	12	12	12	12	12